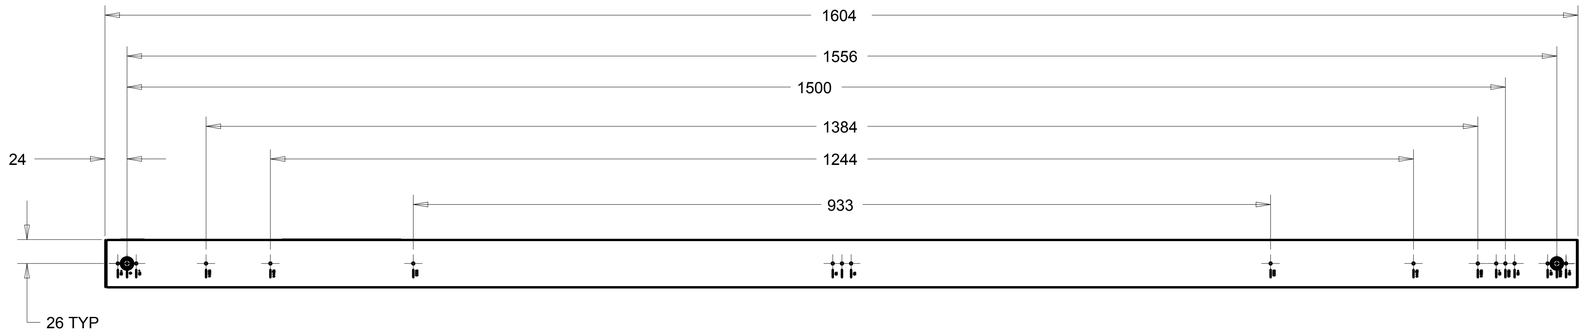

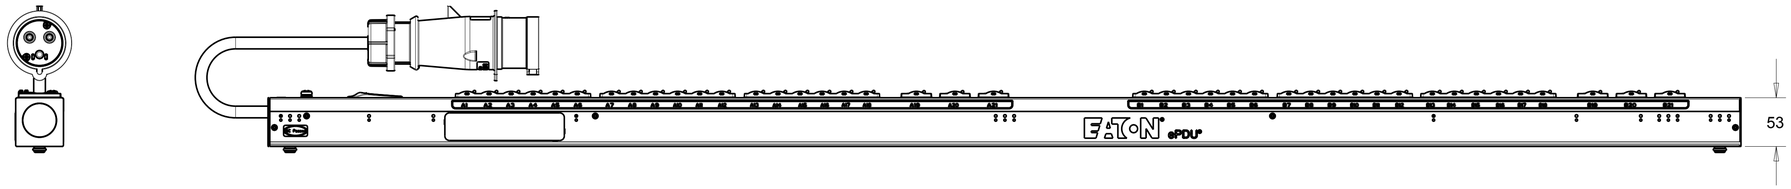

CABLE LENGTH SHOWN NOT TO SCALE

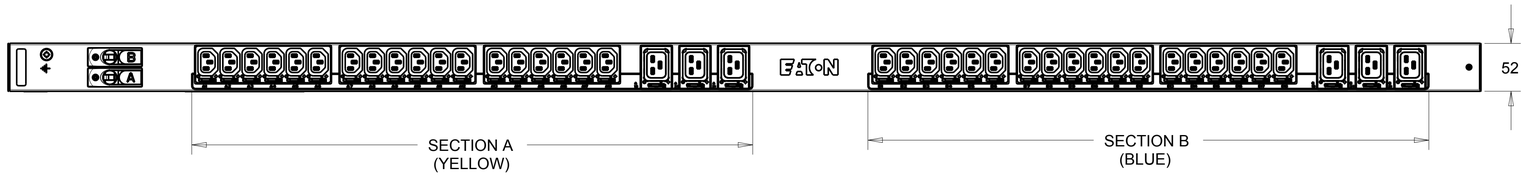

CIRCUIT SCHEMATIC

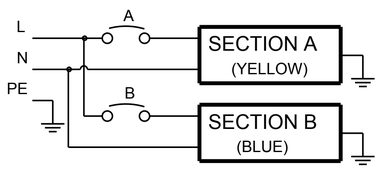

EBAB08	G3 BASIC		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
NONE	IEC 60309-2 32A 230V~ W+N+PE 4.0MM HO7 POWER CORD CABLE LENGTH: 3.0M	(36) IEC 60320 C13 GRIP (6) IEC 60320 C19 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1604MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	1Ø; 200-240V~ W+N+PE 50/60Hz 32A	200-240V~;50/60Hz 10A PER C13;16A PER C19 16A MAX PER SECTION 32A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
(2) 16A 1-POLE	NONE	STANDARD KSP026 - EPDU G3 EMEA VERT INSTALL PACK KA35	EBA3CE8FBDG77AM

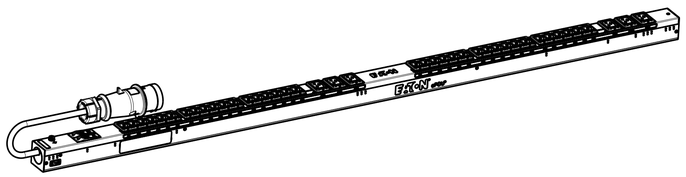

PICTORIAL VIEW
SCALE 0.150

REV.	MODIFICATION	DATE	DESS/DRAW	VERIF.
00	INITIAL RELEASE	06.04.2017	RA	MB

EATON — HEINEMANN PRODUCTS, CH-1345 LE LIEU SWITZERLAND

VUE/VIEW EUROPE. | ECHELLE / SCALE 3/10 | N° MAG EBAB08

DESSINE LE / DRAWED THE 06.04.2017

PAR / BY RA

TOLERANCE GENERALE / GENERAL TOLERANCE | VERIFIE PAR / VERIFIED BY MB

TRAITEMENT / FINISH N/A N/A

MATIERE / MATERIAL N/A N/A

NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT | DIMENSIONS AND TOLERANCES IN MILLIMETERS

DESIGNATION EPDU BA 0U (309 32A 1P)36XC13:6XC19

COTES A CONTROLER INSPECTION DIMENSIONS XX.XX | COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS # XX.XX

NUMERO DU PLAN PLAN NUMBER SK-58119-Y1 | REV. 00

Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation.
This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.