

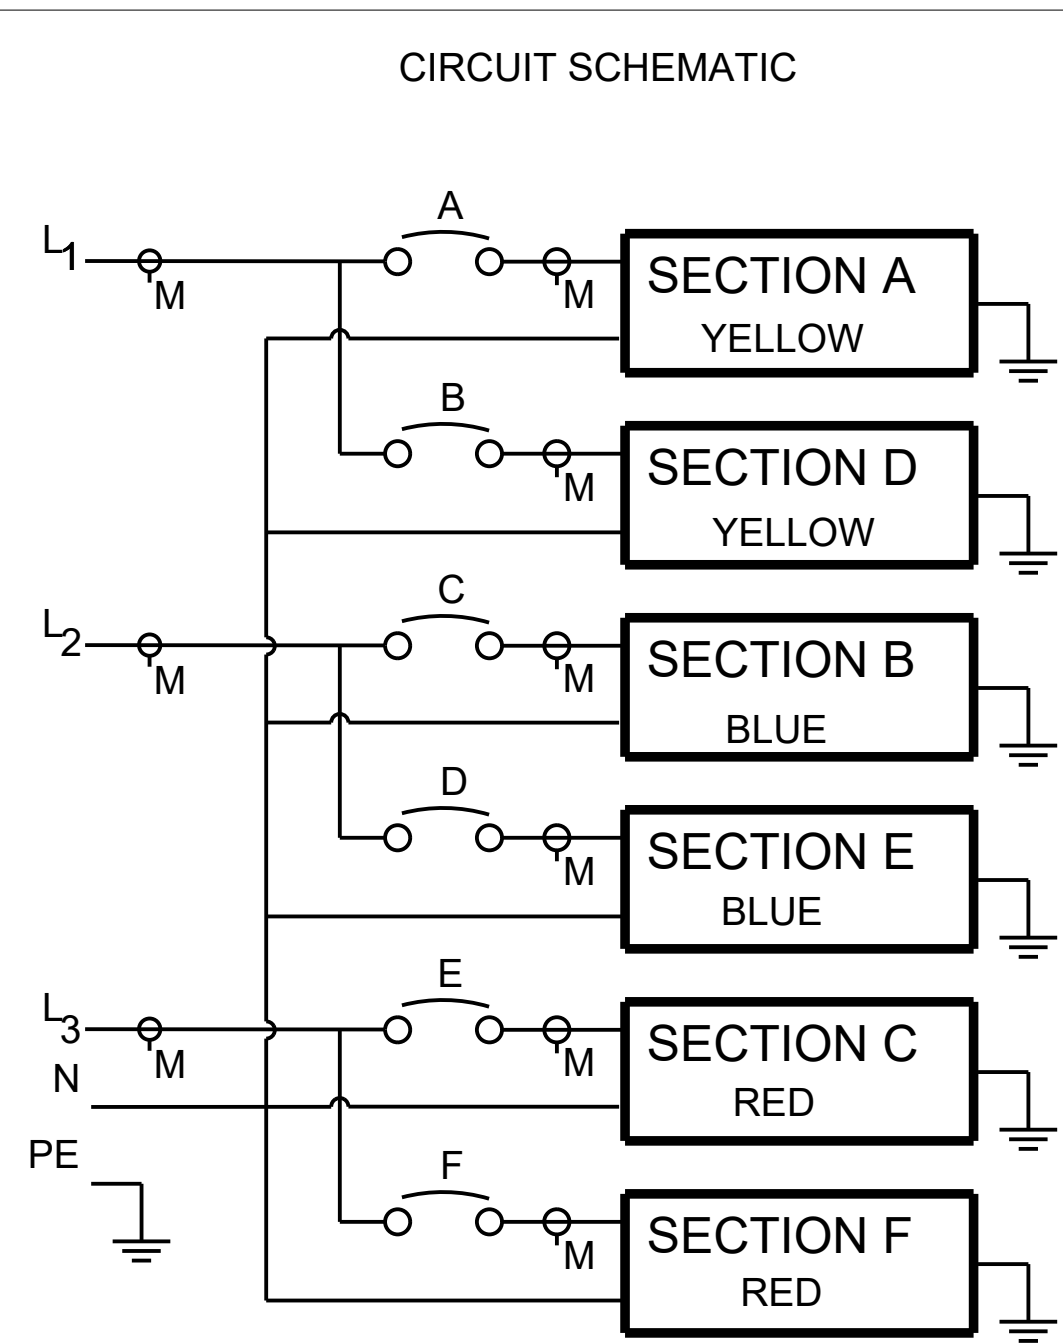
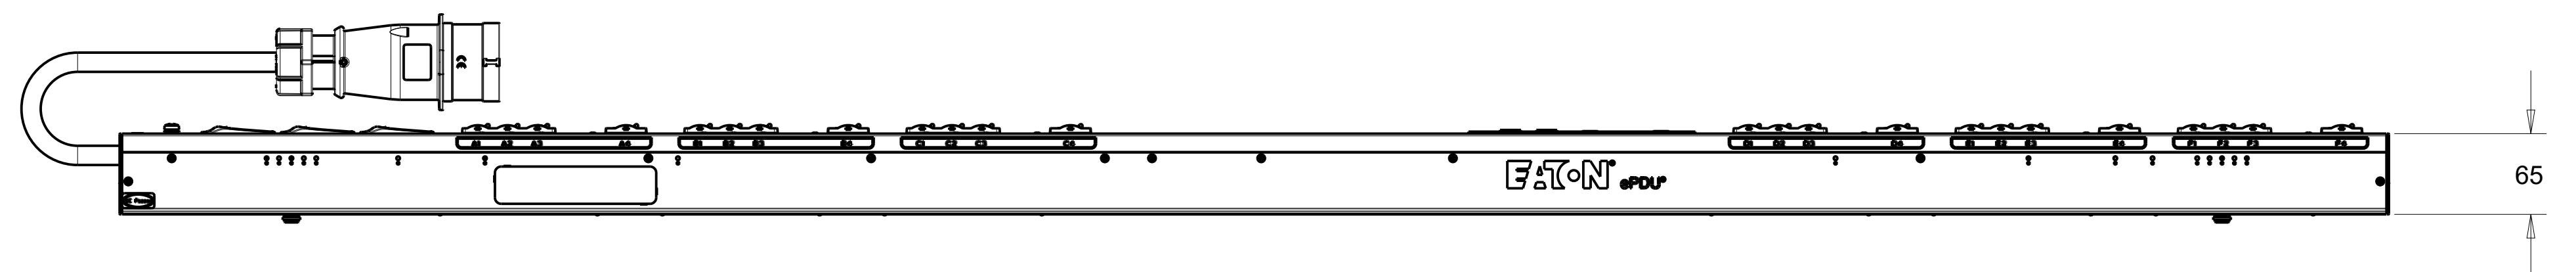



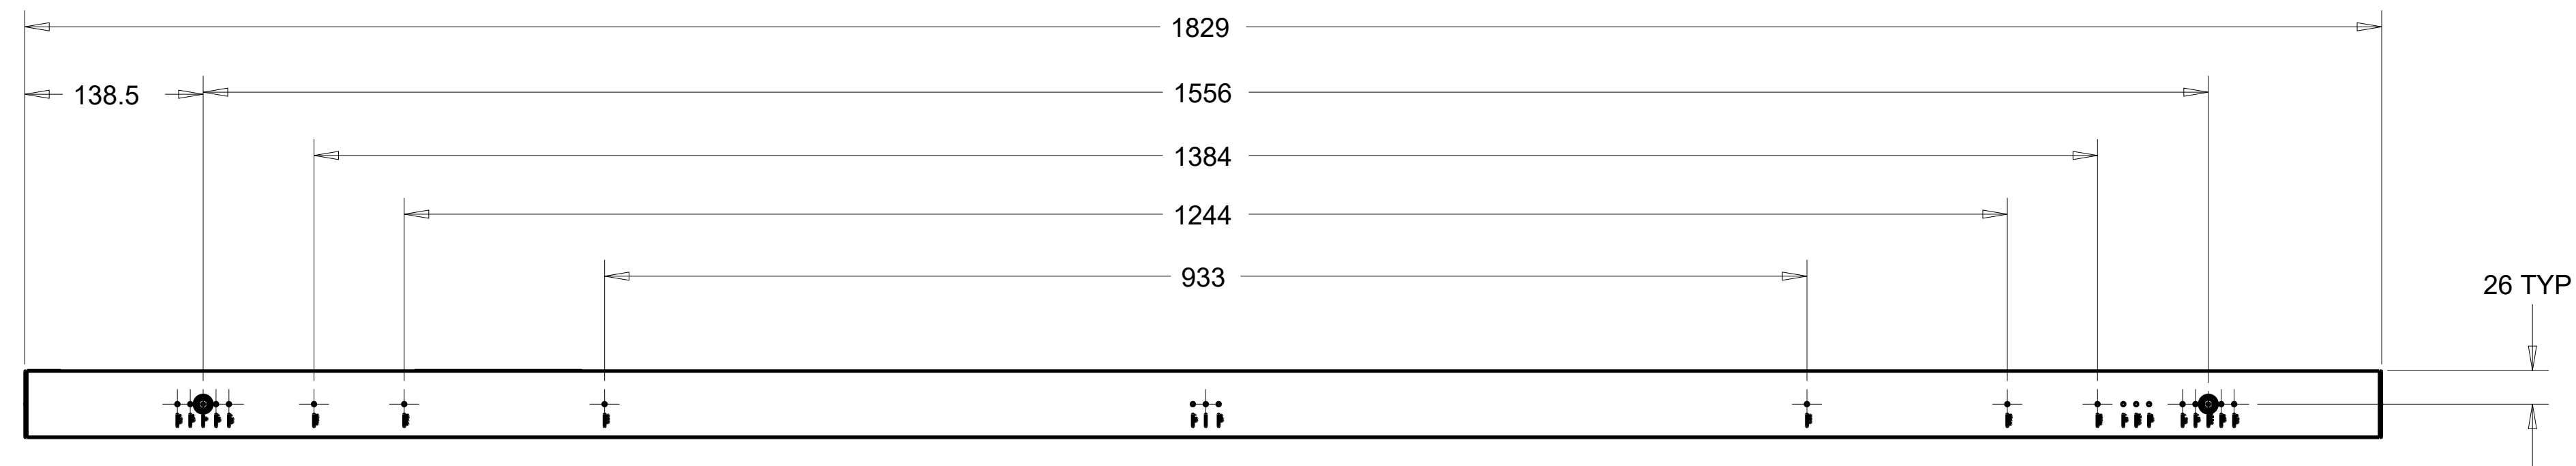

CABLE LENGTH SHOWN NOT TO SCALE

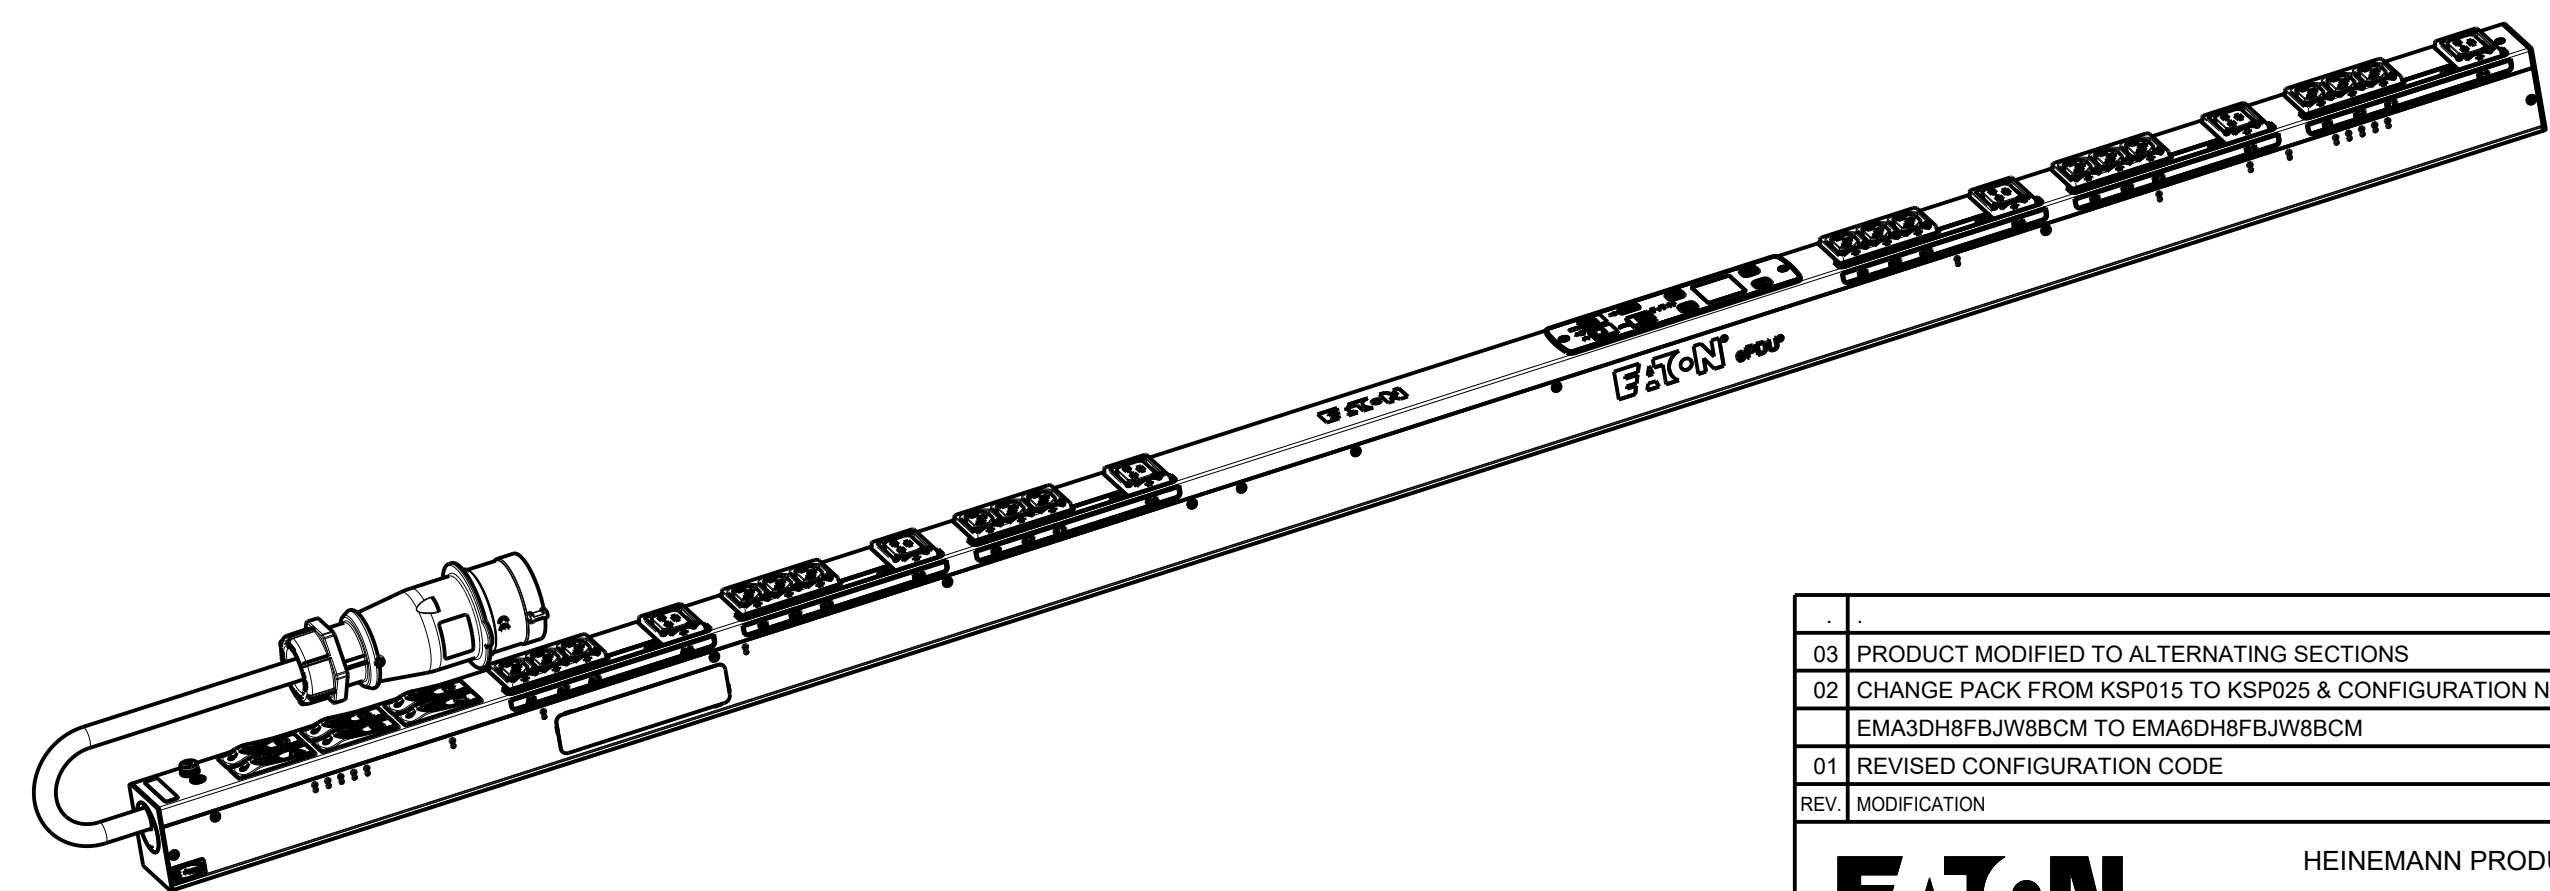

SCALE 0.188

03	PRODUCT MODIFIED TO ALTERNATING SECTIONS	06.03.2019	AEK	M.B
02	CHANGE PACK FROM KSP015 TO KSP2025 & CONFIGURATION NO FROM ...	08.05.2017	VV	M.B
	EMA3DHFBJW8BCM TO EMA6DHFBJW8BCM			
01	REVISED CONFIGURATION CODE	03.11.2014	G.McD	M.B
REV.	MODIFICATION	DATE	DESS/DRAW	VERIF.
 HEINEMANN PRODUCTS CH-1345 LE LIEU SWITZERLAND		VUE/VIEW EUROPE	ECHELLE / SCALE 4/10	N° MAG EMAB33
		DESSINE LE / DRAWED THE		20.08.2014
		PAR / BY		G.McD
		VERIFIE PAR / VERIFIED BY		M.B
TOLERANCE GENERALE / GENERAL TOLERANCE				
TRAITEMENT / FINISH		NA		
MATIERE / MATERIAL		NA		
NIVEAU DU MILLIMETRE DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT			X	DIMENSIONS AND TOLERANCES IN MILLIMETERS
DESIGNATION		EPDU MA 0U (309 32A 3P)18XC13:6XC19		03
COTES A CONTROLER INSPECTION DIMENSIONS		☐ XX.XX COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS # XX.XX		
		NUMERO DU PLAN PLAN NUMBER		REV.
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.				

EMAB33		G3 MANAGED	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT, BRANCH AND OUTLETS. INDIVIDUAL OUTLET CONTROL	IEC 60309-2 32A 400V~ WYE, 3W+N+PE 4.0MM HO7 POWER CORD CABLE LENGTH: 3.0M	(18) IEC 60320 C13 GRIP (6) IEC 60320 C19 GRIP ALTERNATING SECTIONS	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1829MM WIDTH: 52 MM DEPTH: 65MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	3Ø:346-415V~; WYE, 3W+N+PE 50/60HZ 32A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX PER SECTION 32A MAX PER PHASE	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
(6) 16A 1-POLE	NONE	STANDARD KSP025 - VERT INSTALLATION AND NETWORK PACK KA35 OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMA6DH8FBJW8BCM