



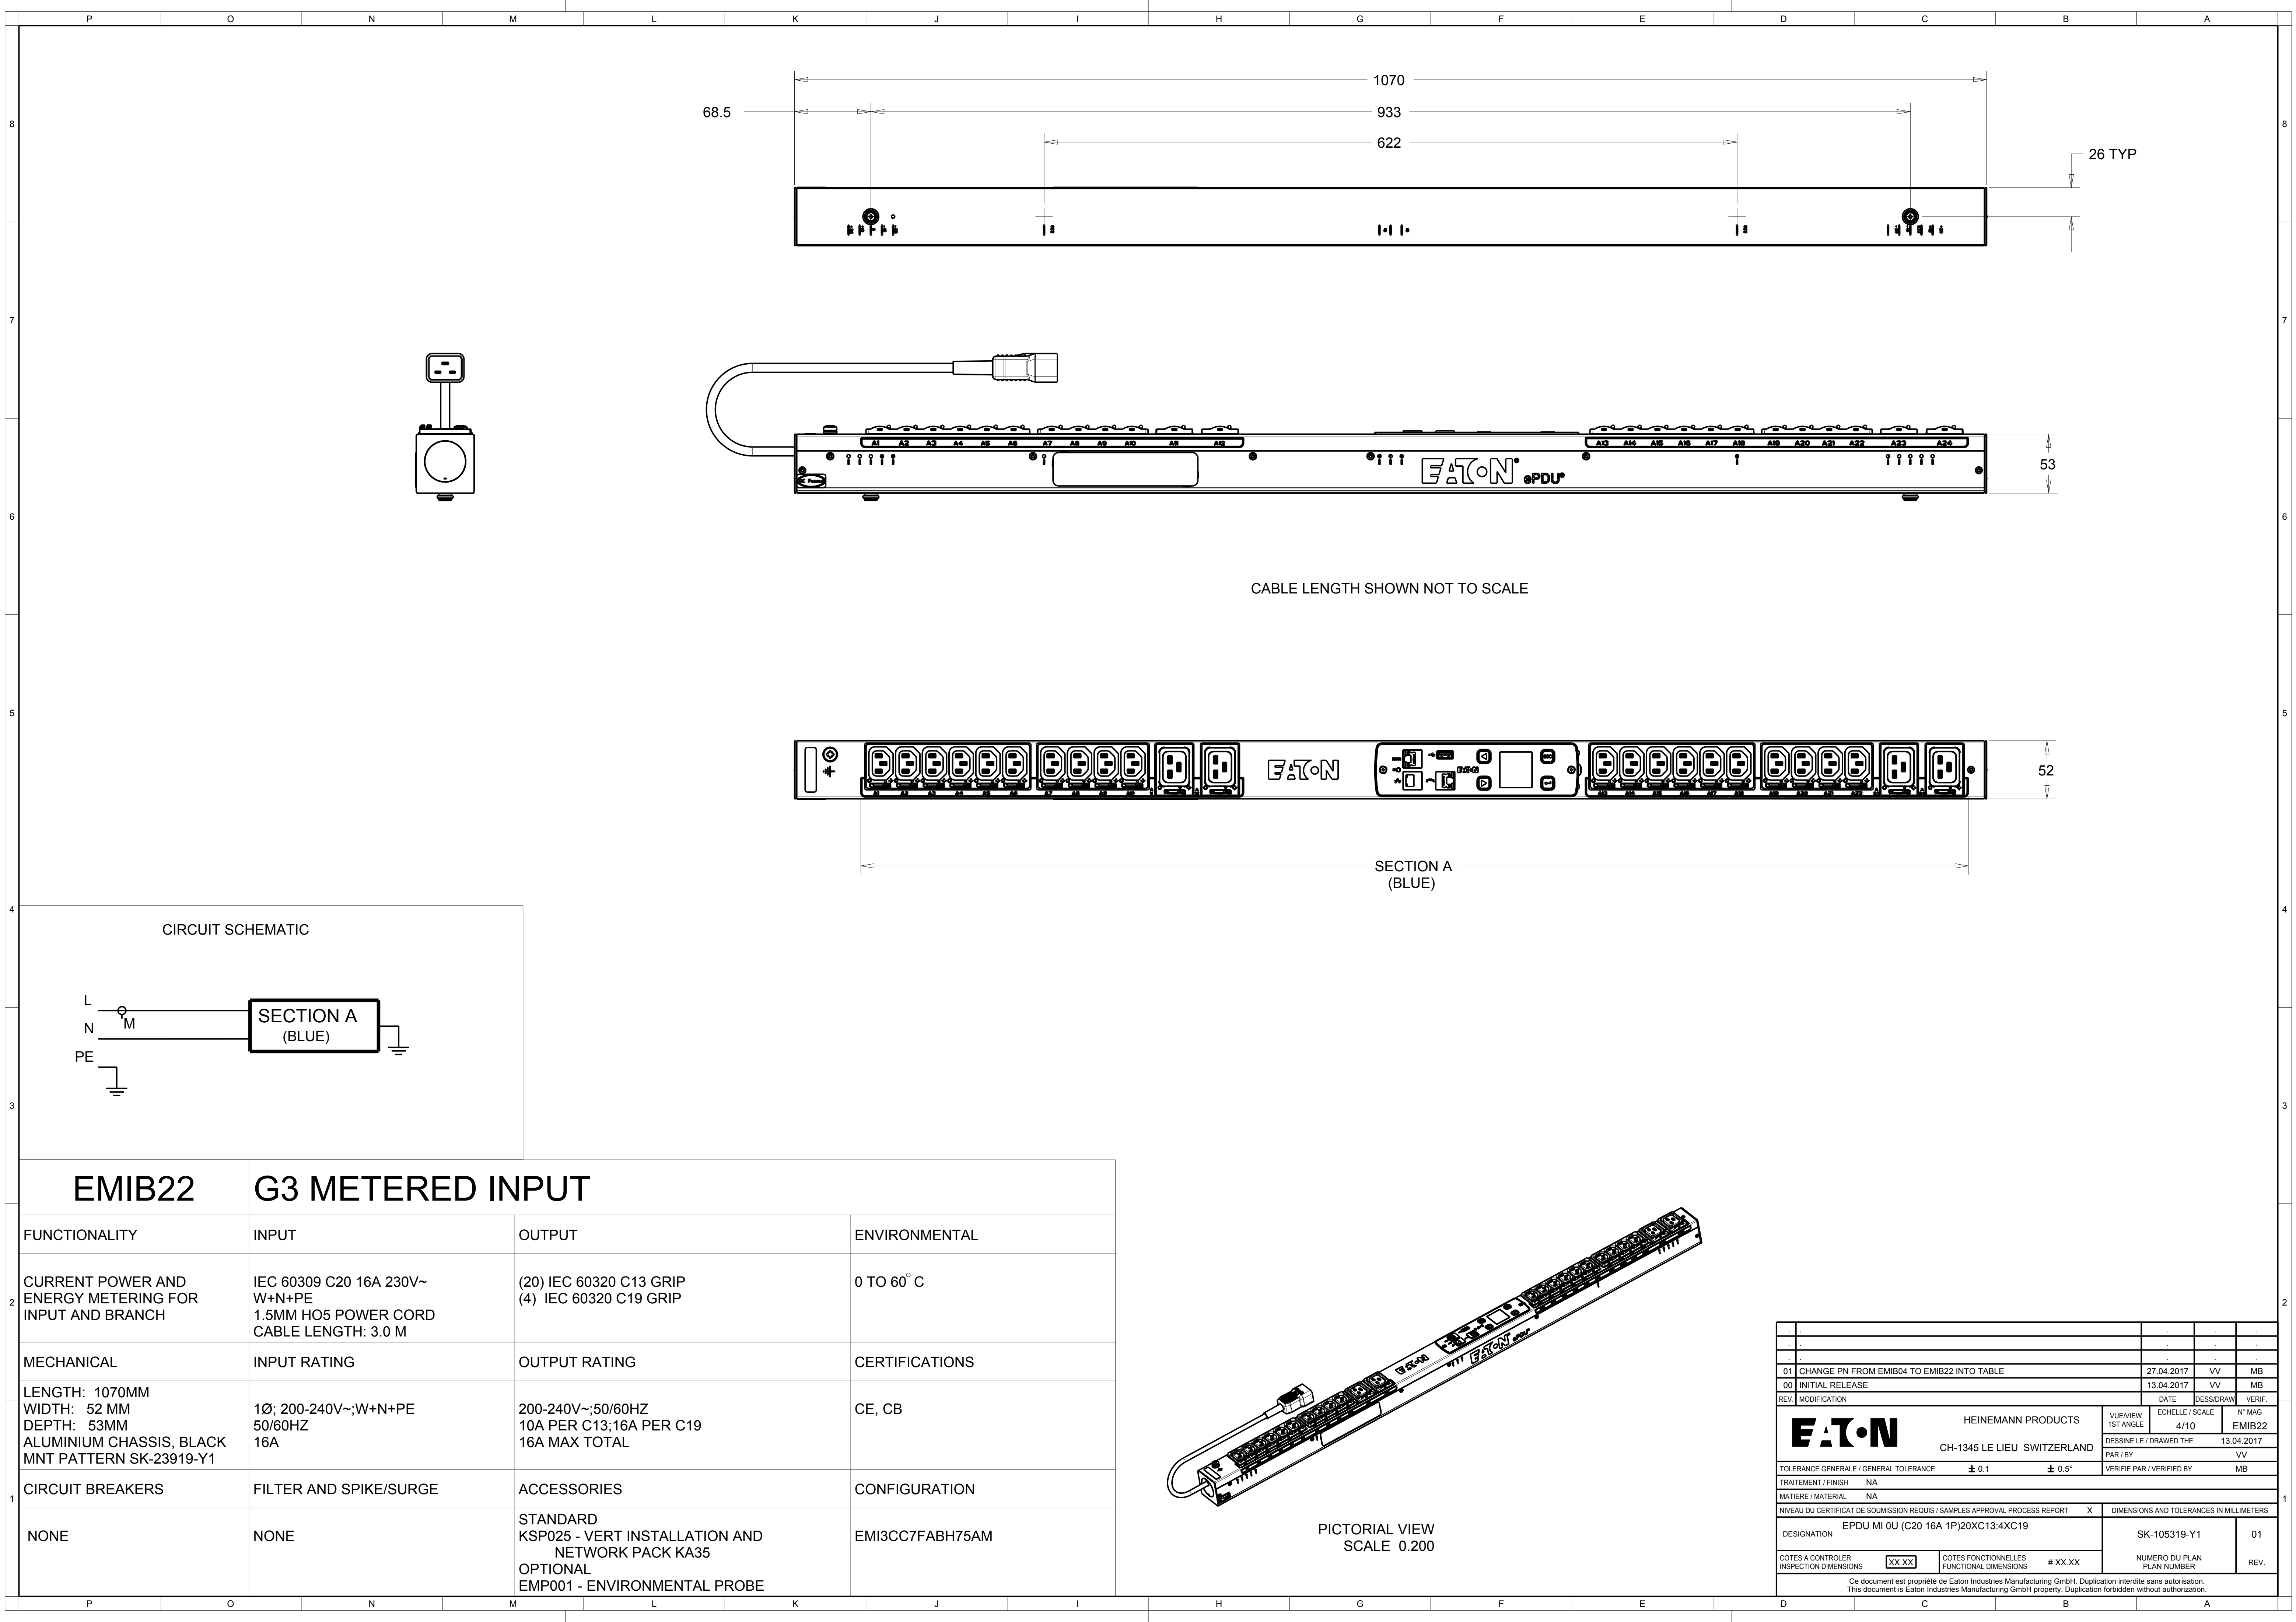

EMIB22		G3 METERED INPUT	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH	IEC 60309 C20 16A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	(20) IEC 60320 C13 GRIP (4) IEC 60320 C19 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1070MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	1Ø; 200-240V~;W+N+PE 50/60HZ 16A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP025 - VERT INSTALLATION AND NETWORK PACK KA35 OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMI3CC7FABH75AM

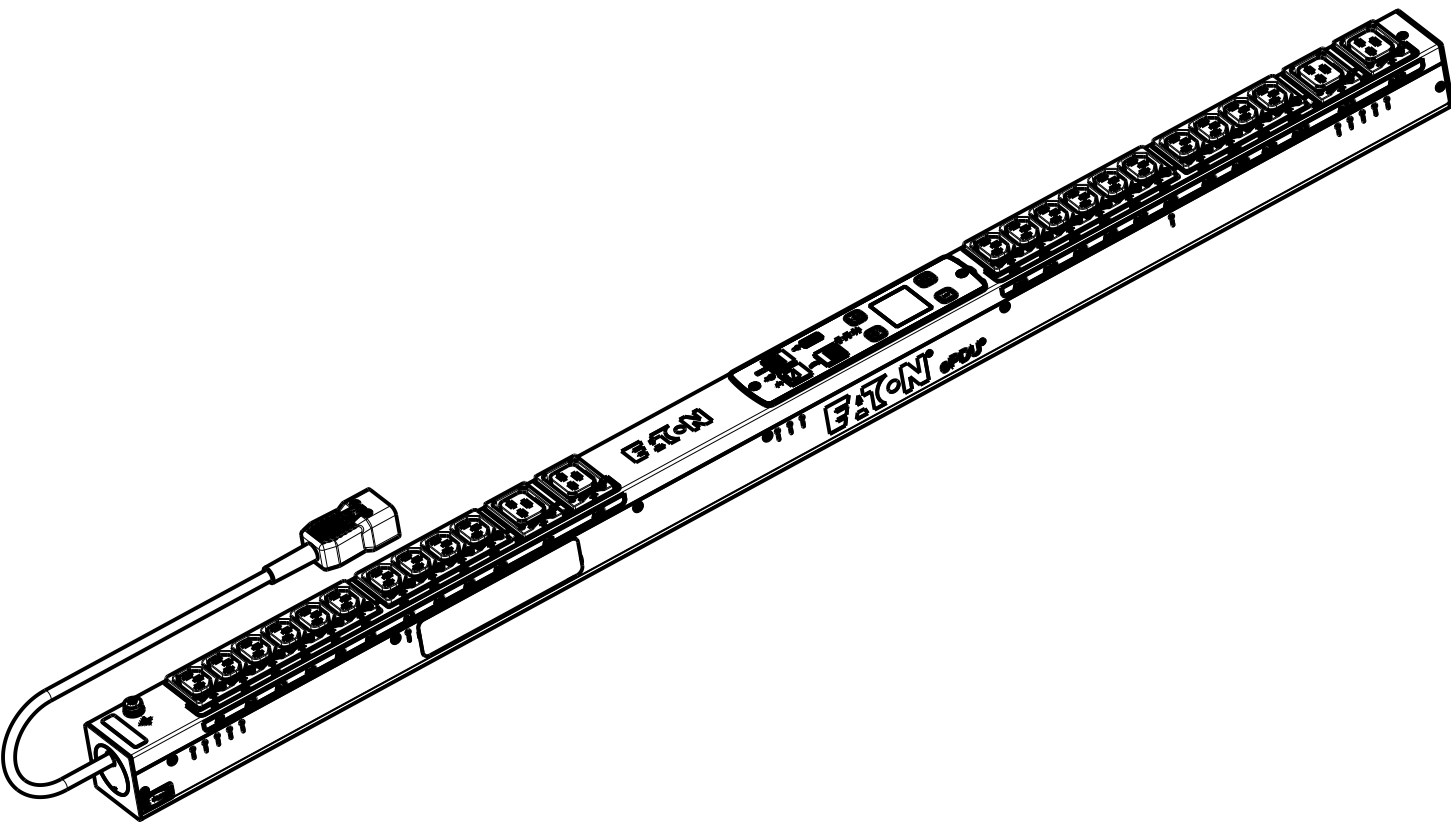

PICTORIAL VIEW
SCALE 0.200

-		-	-	-
-		-	-	-
-		-	-	-
01 CHANGE PN FROM EMIB04 TO EMIB22 INTO TABLE		27.04.2017	VV	MB
00 INITIAL RELEASE		13.04.2017	VV	MB
REV.	MODIFICATION	DATE	DESSIN/RAW	VERIF.
EAT•N		HEINEMANN PRODUCTS	VUE/VIEW 1ST ANGLE	N° MAG 4/10
CH-1345 LE LIEU SWITZERLAND		DESSINE LE / DRAWED THE	13.04.2017	
TOLERANCE GENERALE / GENERAL TOLERANCE		± 0.1	± 0.5°	VERIFIE PAR / VERIFIED BY MB
TRAITEMENT / FINISH NA				
MATIERE / MATERIAL NA				
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT		X	DIMENSIONS AND TOLERANCES IN MILLIMETERS	
DESIGNATION EPDU MI 0U (C20 16A 1P)20XC13:4XC19		SK-105319-Y1		01
COTES A CONTROLER INSPECTION DIMENSIONS		XX.XX	COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS	# XX.XX
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.		NUMERO DU PLAN PLAN NUMBER		